ROHS

LEADER TIME SRL

PRODUCT SPECIFICATION

128*64 Graphic COB LCD MODULE MODEL: LT-12864B1-601 Ver:1.0

< > > Finally Specification

CUSTOMER'S APPROVAL					
CUSTOMER:					
SIGNATURE: DATE:					
•					

APPROVED	РМ	PD	PREPARED
ВҮ	REVIEWD	REVIEWD	Ву

Prepared By: LEADER TIME SRL

VIA MONS. PROSDOCIMI, 27 36042 BREGANZE (VI)

• This specification is subject to change without notice. Please contact LT or it's representative before designing your product based on this specification.

1/1

Issued Date:2011.04.30 Doc. No.:

Revision Status

Version	Revise Date	Page	Content	Modified By
Ver. 1.0	2011.04.30		First Issued	

Table of Contents

No. Contents	Page
1. FEATURES	4
2. MECHANICAL SPECIFICATIONS	4
3. ELECTRICAL SPECIFICATIONS	4
4. TERMINAL FUNCTIONS AND BLOCK DIAGRAM	6
5. TIMING CHARACTERISTICS	7
6. COMMAND LIST	8
7. QUALITY SPECIFICATIONS	9
8. RELIABILITY	14
9. HANDLING PRECAUTION	15
10. OUTLINE DIMENSION	16

1. Features

The features of LCD are as follows

* Display mode : FSTN/Transflective/ Positive

* Drive IC : SAP1024B * Interface Input Data : 8080 Series

* Driving Method : 1/64Duty, 1/9 Bias

* Viewing Direction : 6 O'clock * Backlight :LED/ White

*Sample NO. : EG1206C1FSW6B-B0_01/20110428

2. MECHANICAL SPECIFICATIONS

Item	Specification	Unit
Module Size	78.0 (W) x 70.0 (H) x 14.0 MAX(D)	mm
Number of Dots	128 x 64	Dots
View Display Area	62.0 (W) x 44.0 (H)	mm
Activity Display Area	56.28 (W) x 38.36 (H)	mm
Dot Size	0.4(W) x 0.56(H)	mm
Dot Pitch	0.44 (W) x 0.6 (H)	mm

3. ELECTRICAL SPECIFICATIONS

3-1 ABSOLUTR MAZIMUM RATINGS (Ta = 25 °C)

Item	Symbol	Star			
item	Symbol	Min.	Тур.	Max.	Unit
Supply Voltage For Logic	VDD-VSS	-0.3	-	7.0	V
Supply Voltage For LCD Drive	V _{op} = V _{DD} - V ₀	-0.3	-	Vdd+0.3	V
Operating Temp.	Тор	-20	-	+70	°C
Storage Temp.	Tst	-30	-	+80	°C

^{*.} NOTE: The response time will be extremely slow when the operating temperature is around -10°C, and the back ground will become darker at high temperature operating.

3-2 ELECTRICAL CHARACTERISTICS

ltem		Symbol	Test Condition	Min.	Тур.	Max.	Unit
Logic supply Voltage		VDD — Vss		4.5	5	5.5	V
LCD Dri	LCD Drive		Ta = 25 °C	13.1	13.4	13.7	V
Input Voltage	"H" Level	V _{IH}	V _{DD} =5V ± 10%	VDD-2.2	-	VDD	V
	"L" Level V _{IL}			0	-	0.8	V
Frame Frequency		f_FLM		-	60	-	MHz
Current Cons	umption	I_{DD}		-	10.2	-	mA

3-3. BACKLIGHT

3-3-1. Absolute Maximum Ratings

Item	Symbol	Condition	Min.	Тур.	Max.	Unit
Forward current	IF		-	60	-	mA
Reverse Voltage	VR	Ta = 25 °C If=60mA		-	5	V
Power Dissipation	PD			-	36	mW

3-3-2. Electrical-optical Characteristics

Item	Symbol	Condition	Mi	in.	Ту	p.	Ma	ax.	Unit
Forward Voltage	VF		2.	.9	3.	.1	3.	.3	V
Average Luminous Intensity	Lv	If=60mA Ta = 25 °C	l	00		-		•	cd/m ²
Colour coordinate	_	1a = 25 C	Х	Υ	Х	Υ	Х	Υ	nm
Colour coordinate			0.26	0.26	0.28	0.28	0.30	0.30	11111

The brightness is measured without LCD panel


For operation above 25 °C,The lfm & Pd must be derated , the current derating is -0.36mA/ °C for DC drive and -0.86mA/ °C for Pulse drive ,the Power dissipation is -0.75mW/ °C.The product working current must not more than the 60% of the lfm or lfp according to the working temperature.

4. TERMINAL FUNCTIONS AND BLOCK DIAGRAM

4-1. INTERFACE PIN FUNCTION DESCRIPTION


PIN NO.	SYMBOL	FUNCIONS			
1	FG	Frame ground			
2	Vss	Ground (0V)			
3	VDD	Supply voltage for logical circuit(5V)			
4	V0	Supply voltage for LCD driving			
5	/WR	Write enable signal			
6	/RD	Read enable signal			
7	/CE	Chip selection signal			
8	C/D	Select the command is instruction or data			
9	/RST	Reset signal			
10-17	DB0~DB7	Data bus line			
18	FS	Font selection pin			
19	LEDA	Backlight (+5.0V)			
20	LEDK	Backlight (0V)			

4-2. BLOCK DIAGRAM

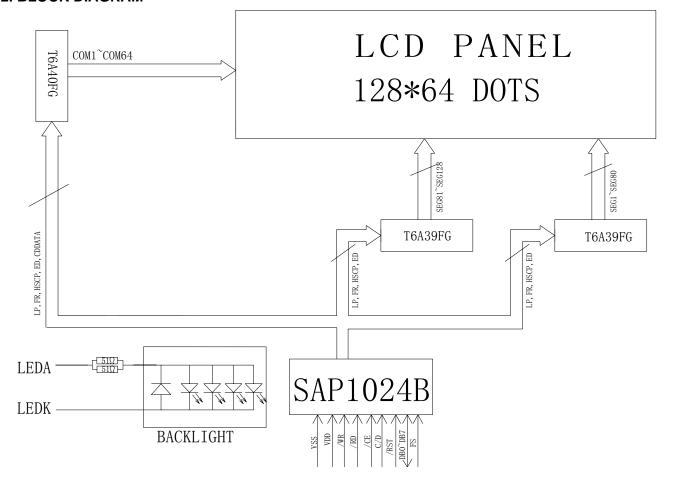

5. TIMING CHARACTERISTICS

5 - 1 System bus read/write characteristics

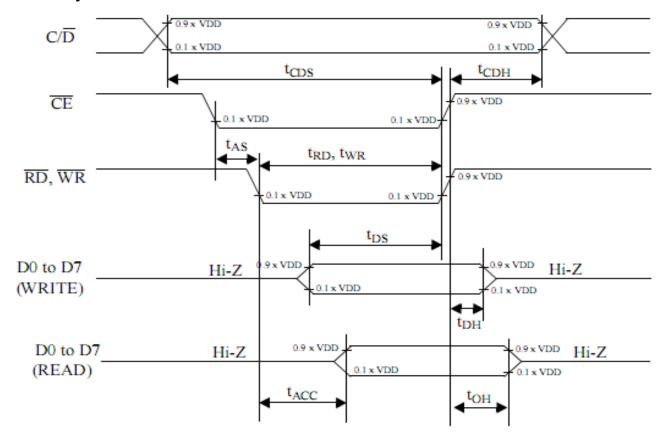

 $V_{DD} = 5 V \pm 10\%$; $V_{SS} = 0 V$; $T_{amb} = -20 ^{\circ}C$ to $+70^{\circ}C$.

symbol	parameter	MIN.	MAX.	test conditions	Unit
t _{CDS}	C/D set-up time	100			ns
t _{CDH}	C/D hold time	10			ns
t_{RD} , t_{WR}	RD, WR pulse width	80			ns
t _{AS}	Address set-up time	0			ns
t _{AH}	Address hold time	0			ns
t _{DS}	Data set-up time	80			ns
t _{DH}	Data hold time	40		Note	ns
tacc	Access time		150	Note	ns
tон	Output hold time	10	50	Note	ns


6. COMMAND LIST

COMMAND	CODE	D1	D2	FUNCTION
	00100001	X address	Y address	Set Cursor Pointer
REGISTERS SETTING	00100010	Data	00H	Set Offset Register
	00100100	Low address	High address	Set Address Pointer
	01000000	Low address	High address	Set Text Home Address
SET CONTROL WORD	01000001	Columns	00H	Set Text Area
SET CONTROL WORD	01000010	Low address	High address	Set Graphic Home Address
	01000011	Columns	00H	Set Graphic Area
	1000X000	_	_	OR mode
	1000X001	_	_	EXOR mode
MODE SET	1000X011	_	_	AND mode
INIODE SET	1000X100	_	_	Text Attribute mode
	10000XXX	_	_	Internal CG ROM mode
	10001XXX	_	_	External CG RAM mode
	10010000	_	_	Display off
	1001XX10	_	_	Cursor on, blink off
DISPLAY MODE	1001XX11	_	_	Cursor on, blink on
DISPLAT MODE	100101XX	_	_	Text on, graphic off
	100110XX	_	_	Text off, graphic on
	100111XX	_	_	Text on, graphic on
	10100000	_	_	1-line cursor
	10100001	l –	_	2-line cursor
	10100010	_	_	3-line cursor
CURSOR PATTERN	10100011	_	_	4-line cursor
SELECT	10100100	_	_	5-line cursor
	10100101	_	_	6-line cursor
	10100110	_	_	7-line cursor
	10100111	_	_	8-line cursor
DATA AUTO DEAD /	10110000	_	_	Set Data Auto Write
DATA AUTO READ/	10110001	_	_	Set Data Auto Read
WRITE	10110010	_	_	Auto Reset
	11000000	Data	_	Data Write and Increment ADP
	11000001	_	_	Data Read and Increment ADP
DATA DEAD (MOITE	11000010	Data	_	Data Write and Decrement ADP
DATA READ/WRITE	11000011	_	_	Data Read and Decrement ADP
	11000100	Data	_	Data Write and Nonvariable ADP
	11000101	_	_	Data Read and Nonvariable ADP
SCREEN PEEK	11100000	_	_	Screen Peek
SCREEN COPY	11101000			Screen Copy

Issued Date:2011.04.30 Doc. No.:

7. QUALITY SPECIFICATIONS


- 7 1. LCM Appearance and Electric inspection Condition
- 1. Inspection will be done by placing LCM 30cm away from inspector's eyeballs under normal illumination.

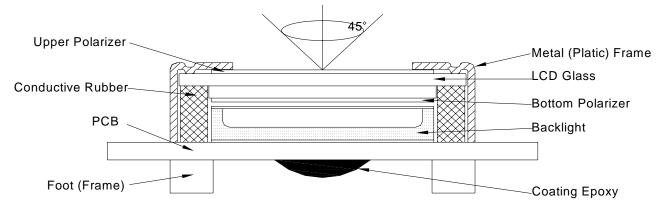


2. View Angle: with in 45° around perpendicular line.

7- 2. Definition


1. COB

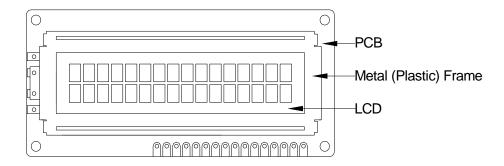

2. Heat Seal

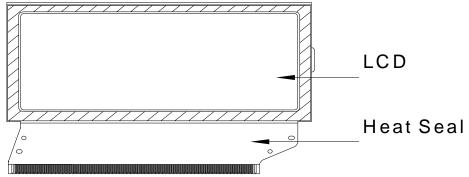

3.TAB and COG

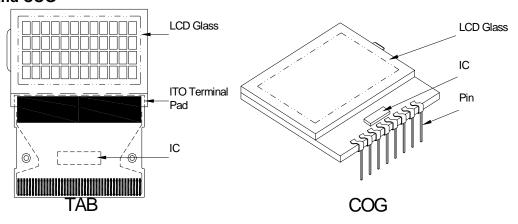

7-3. Sampling Plan and Acceptance

1.Sampling Plan

MIL - STD - 105E (||) ordinary single inspection is used.

2.Acceptance

Major defect: AQL = 0.65%Minor defect: AQL = 1.5%

7-4. Criteria

1.COB

Defect	Inspection Item	Inspection Standards	
Major	PCB copper flakes peeling off	Any copper flake in viewing Area should be greater than 1.0mm ²	Reject
Major	Height of coating epoxy	Exceed the dimension of drawing	Reject
Major	Void or hole of coating epoxy	Expose bonding wire or IC	Reject
Major	PCB cutting defect	Exceed the dimension of drawing	Reject

2.SMT

Defect	Inspection Item	Inspection Standa	ards
Minor	Component marking not readable		Reject
Minor	Component height	Exceed the dimension Of drawing	Reject
Major	Component solder defect (missing, extra, wrong component or wrong orientation		Reject
Minor	Component position shift component soldering pad	X < 3/4Z Y > 1/3D	Reject Reject
Minor	Component tilt component soldering pad	Y > 1/3D	Reject
Insufficient solder component Minor PAD PCB		<i>θ</i> ≤ 20°	Reject

3. Metal (Plastic) Frame

Defect	Inspection Item	Inspection Standards				
Major	Crack / breakage	Any	/where	Reject		
		W	L	Acceptable of Scratch		
		w<0.1mm	Any	Ignore		
		0.1 <u><</u> w<0.2mm	L <u><</u> 5.0mm	2		
Minor	Frame Scratch	0.2 <u><</u> w<0.3mm	L <u><</u> 3.0mm	1		
-		w <u>></u> 0.3mm	Any	0		
		Note: 1. Above criteria applicable to scratch lines with distance greater than 5mm. 2. Scratch on the back side of frame (not visible) can be ignored.				
				Acceptable of Dents / Pricks		
		Φ<	1.0mm	2		
	Frame Dent , Prick	1.0<⊕ <u><</u> 1.5mm 1.5mm<⊕		1		
Minor	$\Phi = \frac{L + M}{L}$			0		
	2	Note: 1. Above criteria applicable to any two dents / pricks with distance greater than 5mm 2. Dent / prick on the back side of frame (not visible) can be ignored				
Minor	Frame Deformation	Exceed the dimension of drawing				
Minor	Metal Frame Oxidation	Any rust				

4. Flexible Film Connector (FFC)

Defect	Inspection Item	Inspection Standards		
Minor	Tilted soldering	Within the angle +5°	Acceptable	
Minor	Uneven solder joint /bump		Reject	
		Expose the conductive line	Reject	
Minor	Hole $\Phi = \frac{L + W}{2}$	Ф > 1.0mm	Reject	
7	Y - Y - D	Y > 1/3D	Reject	
		X > 1/2Z	Reject	

5. Screw

<u>5. OCICW</u>	7. OOI OW						
Defect	Inspection Item	Inspection Standards					
Major Screw missing/loosen			Reject				
Minor	Screw oxidation	Any rust	Reject				
Minor Screw deformation		Difficult to accept screw driver	Reject				

6. Heatseal 、TCP 、FPC

Defect	Inspection Item	Inspection Standards	
Major	Scratch expose conductive layer		Reject
Minor	HS Hole $\Phi = \frac{L + W}{2}$	⊕> 0.5mm	Reject
Major	Adhesion strength	Less than the specification	Reject
Minor	Position shift	Y > 1/3D	Reject
IVIII IOI	Λ 	X > 1/2Z	Reject
Major	Conductive line break		Reject

7. LED Backing Protective Film and Others

Defect	Inspection Item	Inspection Standards		
		Acceptable number of units		
		Φ <u><</u> 0.10mm	Ignore	
	LED dirty, prick	0.10<⊕ <u><</u> 0.15mm	2	
Minor		0.15<⊕ <u><</u> 0.2mm	1	
		Φ>0.2mm	0	
		The distance between any two spots should be ≥5mm Any spot/dot/void outside of viewing area is acceptable		
Minor	Protective film tilt	t Not fully cover LCD F		
Major	COG coating	Not fully cover ITO circuit		

8. Electric Inspection

Defect	Inspection Item	m Inspection Standards	
Major	Short		Reject
Major	Open		Reject

Issued Date: 2010.11.01 **Doc. No.:**

9. Inspection Specification of LCD
Defect Inspect Item

Defect	Inspect Item			Inspection Standards						
	* Glass Scratch		W	W <u><</u> 0.03		0.0			V>0.05	
Minor		* Polarizer Scratch	L	L	L<5		L<3		Any	
	Linear Defect	* Fiber and Linear	ACC. NO.	1			1 I		Reject	
		material	Note	L is the le	ngth and V	V is th	e width of	the de	efect	
		* Foreign material	Φ	Φ <u><</u> 0.1	0.1<⊕ <u><</u> 0).15 (5 0.15<⊕ <u><</u> 0.2 0		⊕>0.2	
	Black Spot and	between glass and polarizer or glass	ACC. NO.	3EA / 100mm ²	2		1		0	
Minor Polarizer Pricked		and glass * Polarizer hole or protuberance by external force		Φ is the average diameter of the defect. Distance between two defects > 10mm.						
		* Unobvious	Φ	Φ<	<u><</u> 0.3	0.3	<⊕ <u><</u> 0.5	0.	5 <⊕	
		transparant foreign material between	ACC. NO.	3EA / 1	00mm ²		1		0	
Minor	vvnite Spot Idaes and		Note							
	Segment Defect		Φ	Φ <u><</u> 0.10	0.10<⊕≤	<u><</u> 0.20	0.20<⊕≤	<u><</u> 0.25	⊕>0.25	
			ACC. NO.	3EA / 2		1		0		
Minor				W is more than 1/2 segment width			Reject			
		Defect		Note $\Phi = \frac{L + W}{2}$ Distance between two defect is 10mm				m		
			Φ	Φ <u><</u> 0.10	0.10<⊕ <u><</u> 0.20		0.20<Ф	<u><</u> 0.25	Φ>0.25	
	Protuborant	Protuberant	w W	W	Glue	W <u><</u> 1/2 W <u><</u> 0.	_	W <u><</u> 1/2 W <u><</u> 0.		Ignore
Minor	Segment	1 9 1 1		3EA / 100mm²	2		1		0	
			1. Seg	ment	•		•		•	
			E		<u><</u> 0.4mm	0.4 <e< td=""><td>3<u><</u>1.0mm</td><td>B>'</td><td>1.0mm</td></e<>	3 <u><</u> 1.0mm	B>'	1.0mm	
	A occupation		B-	A B	A B-A<1/2B		B-A<0.2 B-A		<0.25	
Minor	Assembly Mis-alignment	B	Jud	udge Acceptable Acceptable Accept			eptable			
			2. Dot	Matrix						
			Defo	Deformation>2°				Reject		
Minor	Stain on LCD Panel Surface		Accept when stains can be wiped lightly with a soft clo or a similar one. Otherwise, judged according to the above items: "Black spot" and "White Spot"							

Issued Date: 2010.11.01 **Doc. No.:**

8. RELIABILITY

NO.	ltem	Condition	Criterion
1	High Temperature Operating	70°C, 96Hrs	
2	Low Temperature Operating	-20℃, 96Hrs	
3	High Humidity	50°C, 90%RH, 96Hrs	
4	High Temperature Storage	80°C, 96Hrs	
5	Low Temperature Storage	-30℃, 96Hrs	No defect in cosmetic and
6	Vibration	Random wave 10 ~ 100Hz Acceleration: 2g 2 Hrs per direction(X,Y,Z)	operational function allowable. Total current Consumption should be below double of initial value.
7	Thermal Shock	-20°C to 25°C to 70°C (60Min) (5Min) (60Min) 16Cycles	
8	ESD Testing	Contract Discharge Voltage: +1 ~ 5kV and -1 ~ -5kV	There will be discharged ten times at every discharging
		Air Discharge Voltage: +1 ~ 8kV and -1 ~ -8kV	voltage cycle. The voltage gap is 1kV.

Note: 1) Above conditions are suitable for our company standard products.

2) For restrict products, the test conditions listed as above must be revised.

Issued Date: 2010.11.01

Doc. No.:

9. HANDLING PRECAUTION

(1) Mounting Method

The panel of the LCD Module consists of two thin glass plates with polarizers which easily get damaged since the Module is fixed by utilizing fitting holes in the printed circuit board. Extreme care should be taken when handling the LCD Modules.

(2) Caution of LCD handling & cleaning

When cleaning the display surface, use soft cloth with solvent (recommended below) and wipe lightly.

- Isopropyl alcohol
- Ethyl alcohol
- Trichloro trifloro thane

Do not wipe the display surface with dry or hard materials that will damage the polarizer surface. Do not use the following solvent:

- Water
- Ketone
- Aromatics
- (3) Caution against static charge

The LCD Module use C-MOS LSI drivers, so we recommend that you connect any unused input terminal to VDD or VSS, do not input any signals before power is turned on. And ground your body, Work/assembly table. And assembly equipment to protect against static electricity.

(4) Packaging

- Modules use LCD elements, and must be treated as such. Avoid intense shock and falls from a height.
- To prevent modules from degradation. Do not operate or store them exposed directly to sunshine or high temperature/humidity.

(5) Caution for operation

- It is indispensable to drive LCD's within the specified voltage limit since the higher voltage than the limit shorten LCD life. An electrochemical reaction due to direct current causes LCD deterioration, Avoid the use of direct current drive.
- Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD's show dark color in them. However those phenomena do not mean malfunction or out of order with LCD's. Which will come back in the specified operating temperature range.
- If the display area is pushed hard during operation, some font will be abnormally displayed but it resumes normal condition after turning off once.
- A slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit.

Usage under the relative condition of 40°C, 50%RH or less is reequired.

(6) Storage

In the case of storing for a long period of time (for instance.) For years) for the purpose or replacement use, The following ways are recommended.

- Storage in a polyethylene bag with sealed so as not to enter fresh air outside in it, And with no desiccant.
- Placing in a dark place where neither exposure to direct sunlight nor light is. Keeping temperature in the specified storage temperature range.
- Storing with no touch on polarizer surface by the anything else. (It is recommended to store them as they have been contained in the inner container at the time of delivery)

(7) Safety

- It is recommendable to crash damaged or unnecessary LCD into pieces and wash off liquid crystal by using solvents such as acetone and ethanol.

Which should be burned up later.

When any liquid crystal leaked out of a damaged glass cell comes in contact with your hands, please wash it off well with soap and water.

Issued Date: 2010.11.01

