LEADER TIME SRL

# **PRODUCT SPECIFICATION**

# 240\*128 Graphic COB LCD MODULE MODEL: LT-240128B-801 Ver:1.0

< $\diamond$  > Finally Specification

	CUSTOMER'S APPROVAL				
CUSTOMER :					
SIG	NATURE:	DATE:			

APPROVED	PM	PD	PREPARED
BY	REVIEWD	REVIEWD	Ву

Prepared By: LEADER TIME SRL VIA MONS. PROSDOCIMI, 27 36042 BREGANZE (VI)

• This specification is subject to change without notice. Please contact LT or it's representative before designing your product based on this specification.

# **Revision Status**

Vereien	Device Dete		Sion Status	Medified Dy
Version	Revise Date	Page	Content	Modified By
Ver. 1.0	2010.09.14		First Issued	
				_

-*-	ssued Date:2010.09.14 loc. No.:
Table of Contents	
No. Contents	Page
1. FEATURES	4
2. MECHANICAL SPECIFICATIONS	4
3. ELECTRICAL SPECIFICATIONS	4
4. TERMINAL FUNCTIONS AND BLOCK DIAGRAM	6
5. TIMING CHARACTERISTICS	7
6. COMMAND LIST	8
7. QUALITY SPECIFICATIONS	9
8. RELIABILITY	14
9. HANDLING PRECAUTION	15
10. OUTLINE DIMENSION	16

# 1. Features

The features of LCD are as follows

- \* Display mode : STN/Blue/Transmissive/ Negative
- \* Drive IC : T6963C
- \* Interface Input Data : 8080 Series
- \* Driving Method : 1/128 Duty, 1/12 Bias
- \* Viewing Direction : 6 O'clock
- \* Backlight :LED/ White
- \*Sample NO. : EG2412A6SGW6B-A3

# 2. MECHANICAL SPECIFICATIONS

Item	Specification	Unit
Module Size	144(W) x 104(H) x 15MAX(D)	mm
Number of Dots	240 x 128 Dots	
View Display Area	114(W) x 64(H)	mm
Activity Display Area	107.95(W)x57.55(H)	mm
Dot Size	0.4(W) x 0.4(H)	mm
Dot Pitch	0.45(W) x 0.45(H)	mm

# **3. ELECTRICAL SPECIFICATIONS**

3-1 ABSOLUTR MAZIMUM RATINGS (Ta = 25 °C)

ltem	Symbol	Symbol Stan		ndard Value			
item	Symbol	Min.	Тур.	Max.	Unit		
Supply Voltage For Logic	Vdd – Vss	-0.3	-	7.0	V		
Supply Voltage For LCD Drive	$V_{op}$ = VLCD - VSS	6	-	28	V		
Input Voltage	Vin	-0.3	-	VDD+0.3	V		
Operating Temp.	Тор	-20	-	+70	°C		
Storage Temp.	Tst	-30	-	+80	°C		

\*. NOTE: The response time will be extremely slow when the operating temperature is around -10 $^{\circ}$ C, and the back ground will become darker at high temperature operating.

### 3-2 ELECTRICAL CHARACTERISTICS

ltem		Symbol	Test Condition	Min.	Тур.	Max.	Unit
Logic supply Voltage		Vdd - Vss		4.5	5	5.5	V
LCD Dri	LCD Drive			19.5	20	20.5	V
Input Voltage	"H" Level	V <sub>IH</sub>	VDD= $5V \pm 5\%$	VDD-2.2	-	Vdd	V
	"L" Level		Level V <sub>IL</sub>	0	-	0.8	V
Frame Frequency		f <sub>FLM</sub>			60		Hz
Current Cons	umption	I <sub>DD</sub>		-	53	-	mA

### 3-3 BACKLIGHT

3-3-1. Absolute Maximum Ratings

ltem	Symbol	Condition	Min.	Тур.	Max.	Unit
Forward Current	IF		-		150	mA
Reverse Voltage	VR	Ta = 25 °C		-	5	V
Power Dissipation	PD			-	485	mW

### 3-3-2. Electrical-optical Characteristics

ltem	Symbol	Condition	m	in	T	ур	N	lax	Unit
Forward Voltage	VF		3.	.0	3	.2	3	.3	V
Average Luminous Intensity	lv	lf=150mA Ta = 25 °C	-		3	00		-	cd/m <sup>2</sup>
Colour coordonate	-		X -	Y -	X 0.28	Y 0.29	X -1	Y -	-


The brightness is measured without LCD panel

# 4. TERMINAL FUNCTIONS AND BLOCK DIAGRAM

### 4-1. INTERFACE PIN FUNCTION DESCRIPTION


-		
No.	Symbol	Function
1	Vss	Groud
2	Vdd	Power supply
3	V0	Bias voltage terminals to drive LCD
4	C/D	C/D:H Command C/D:L Data
5	/RD	Data Read
6	/WR	Data Write
7~14	DB0~DB7	Data I/O pin between CPU and T6963C
15	/CE	Chip enable
16	/RESET	Reset signal pin
17	VEE	Negative voltage of power supply
18	FS1	Pin for selection of font
19	LEDA	Backlight(+5.0V)
20	LEDK	Backlight(-)

### 4-2. BLOCK DIAGRAM

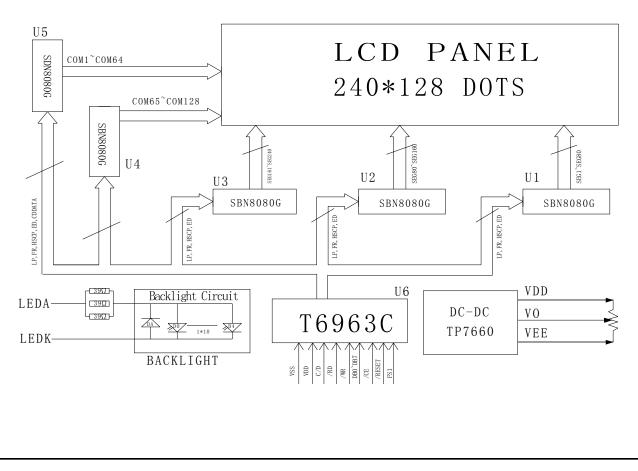

# 5. TIMING CHARACTERISTICS

# 5 - 1 System bus read/write characteristics

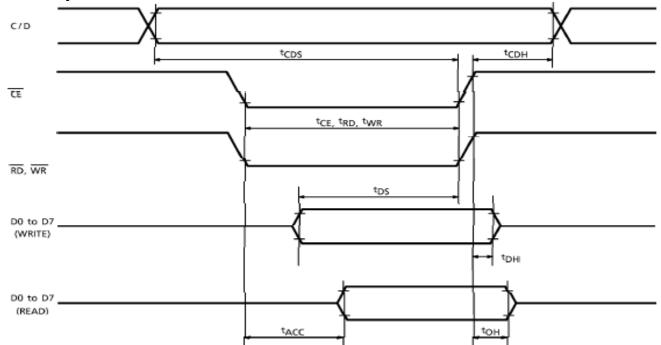

### TEST CONDITIONS (Unless otherwise noted, $V_{DD} = 5.0V \pm 10\%$ , $V_{SS} = 0V$ , Ta = -20 to $75^{\circ}$ C)


ITEM	SYMBOL	TEST CONDITIONS	MIN	MAX	UNIT
C/D Set-up Time	<sup>t</sup> CDS	—	100	—	ns
C/D Hold Time	<sup>t</sup> CDH	—	10	—	ns
CE, RD, WR Pulse Width	tce, trd, twr	—	80	—	ns
Data Set-up Time	t <sub>DS</sub>	—	80	—	ns
Data Hold Time	<sup>t</sup> DH	—	40	—	ns
Access Time	tACC	—	—	150	ns
Output Hold Time	tон	-	10	50	ns

# 6. COMMAND LIST

COMMAND	CODE	D1	D2	FUNCTION
	00100001	X address	Y address	Set Cursor Pointer
REGISTERS SETTING	00100010	Data	00H	Set Offset Register
	00100100	Low address	High address	Set Address Pointer
	01000000	Low address	High address	Set Text Home Address
SET CONTROL WORD	01000001	Columns	00H	Set Text Area
SET CONTROL WORD	01000010	Low address	High address	Set Graphic Home Address
	01000011	Columns	00H	Set Graphic Area
	1000X000	_	—	OR mode
	1000X001	_	_	EXOR mode
MODE SET	1000X011	_	_	AND mode
NODE SET	1000X100	_	_	Text Attribute mode
	10000XXX	_	—	Internal CG ROM mode
	10001XXX	_	_	External CG RAM mode
	10010000	_	_	Display off
	1001XX10	-	_	Cursor on, blink off
DISPLAY MODE	1001XX11	_	_	Cursor on, blink on
DISPLAY MODE	100101XX	-	_	Text on, graphic off
	100110XX	_	_	Text off, graphic on
	100111XX	_	_	Text on, graphic on
	10100000	_	_	1-line cursor
	10100001	-	_	2-line cursor
	10100010	_	_	3-line cursor
CURSOR PATTERN	10100011	l _	_	4-line cursor
SELECT	10100100	_	_	5-line cursor
	10100101	_	_	6-line cursor
	10100110	_	_	7-line cursor
	10100111	_	_	8-line cursor
	10110000	_	_	Set Data Auto Write
DATA AUTO READ/	10110001	-	_	Set Data Auto Read
WRITE	10110010	_	_	Auto Reset
	11000000	Data	_	Data Write and Increment ADP
	11000001	-	_	Data Read and Increment ADP
DATA DEAD UNDER	11000010	Data	_	Data Write and Decrement ADP
DATA READ/WRITE	11000011	_	_	Data Read and Decrement ADP
	11000100	Data	_	Data Write and Nonvariable ADP
	11000101	_	_	Data Read and Nonvariable ADP
SCREEN PEEK	11100000	_	_	Screen Peek
SCREEN COPY	11101000			Screen Copy

# 7. QUALITY SPECIFICATIONS


- 7 1. LCM Appearance and Electric inspection Condition
- 1. Inspection will be done by placing LCM 30cm away from inspector's eyeballs under normal illumination.

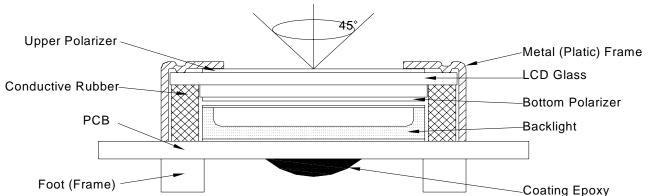


2. View Angle: with in 45° around perpendicular line.

#### 7-2. Definition

#### 1. COB

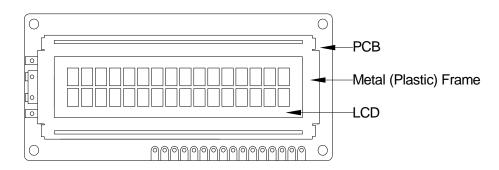

#### 2. Heat Seal

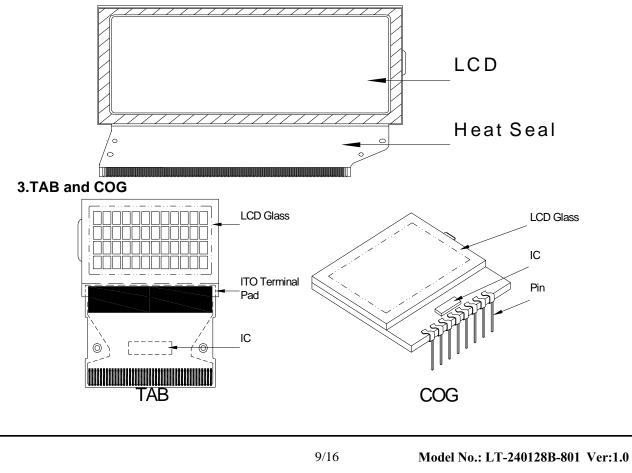

## 7-3. Sampling Plan and Acceptance

#### 1.Sampling Plan

MIL - STD - 105E (  $\parallel$  ) ordinary single inspection is used.

2.Acceptance	
Major defect:	AQL = 0.25%
Minor defect:	AQL = 0.65%

### 7-4. Criteria

### 1.COB

Defect	Inspection Item	Inspection Standards		
Major	PCB copper flakes peeling off	Any copper flake in viewing Area should be greater than 1.0mm <sup>2</sup>	Reject	
Major	Height of coating epoxy	Exceed the dimension of drawing	Reject	
Major	Void or hole of coating epoxy	Expose bonding wire or IC	Reject	
Major	PCB cutting defect	Exceed the dimension of drawing	Reject	

### 2.SMT

Defect	Inspection Item	Inspection Standa	ards
Minor	Component marking not readable		Reject
Minor	Component height	Exceed the dimension Of drawing	Reject
Major	Component solder defect (missing , extra, wrong component or wrong orientation		Reject
Minor	Component position shift x component soldering pad $x$ $\rightarrow$ $x$ $\rightarrow$ $x$ $\rightarrow$ $y$	X < 3/4Z Y > 1/3D	Reject Reject
Minor	Component tilt component D Soldering pad	Y > 1/3D	Reject
Minor	Insufficient solder component θ PAD PCB	<i>θ</i> ≤ 20°	Reject

. Metal (Pla	astic) Frame	1				
Defect	Inspection Item	Inspection Standards				
Major	Crack / breakage	Any	/where	Reject		
		W	L	Acceptable of Scratch		
		w<0.1mm	Any	Ignore		
		0.1 <u>&lt;</u> w<0.2mm	L <u>&lt;</u> 5.0mm	2		
Minor	Frame Scratch	0.2 <u>&lt;</u> w<0.3mm	L <u>&lt;</u> 3.0mm	1		
		w <u>&gt;</u> 0.3mm	Any	0		
		with distance g	e to scratch line e of frame (no			
			<u> </u>	Acceptable of Dents / Pricks		
		⊕ <u>&lt;</u> 1.0mm		2		
	Frame Dent, Prick	1.0<⊕ <u>&lt;</u> 1.5mm		1		
Minor	$\Phi = \frac{L + W}{2}$	1.5	mm< $\Phi$	0		
	2	e criteria applicable tance greater than rick on the back s ignored	5mm			
Minor	Frame Deformation	Exceed the dimension of drawing				
Minor	Metal Frame Oxidation		Any rust			

# 4. Flexible Film Connector (FFC)

Defect	Inspection Item	Inspection Standards		
Minor	Tilted soldering	Within the angle +5°	Acceptable	
Minor	Uneven solder joint /bump		Reject	
		Expose the conductive line	Reject	
Minor	Minor Hole $\Phi = \frac{L+W}{2}$	$\Phi$ > 1.0mm	Reject	
Minor	Position shift $\gamma \xrightarrow{-\psi} -\psi$	Y > 1/3D	Reject	
	X > 1/2Z	Reject		

#### 5. Screw

Defect	Inspection Item	Inspection Standards	
Major	Screw missing/loosen		Reject
Minor	Screw oxidation	Any rust	Reject
Minor	Screw deformation	Difficult to accept screw driver	Reject

Heatseal  TCP  FPC						
Defect	Inspection Item	Inspection Standards				
Major	Scratch expose conductive layer		Reject			
Minor	HS Hole $\Phi = \frac{L + W}{2}$	$\Phi$ > 0.5mm	Reject			
Major	Adhesion strength	Less than the specification	Reject			
Minor	Position shift $Y \xrightarrow{\psi} \xrightarrow{Z_{\leftarrow}} \psi$ $Y \xrightarrow{D}$	Y > 1/3D	Reject			
WIITO		X > 1/2Z	Reject			
Major	Conductive line break		Reject			

## 7. LED Backing Protective Film and Others

Defect	Inspection Item	Inspection Standards			
		Acceptable number of units			
		⊕ <u>&lt;</u> 0.10mm	Ignore		
		0.10<⊕ <u>&lt;</u> 0.15mm	2		
Minor	LED dirty, prick	0.15<⊕ <u>&lt;</u> 0.2mm	1		
		⊕>0.2mm	0		
		The distance between any two spots should be $\geq$ Any spot/dot/void outside of viewing area is acce			
Minor	Protective film tilt	Not fully cover LCD Reje			
Major	COG coating	Not fully cover ITO circuit Reje			

### 8. Electric Inspection

	Defect	Inspection Item	Inspection Standards	
ſ	Major	Short		Reject
	Major	Open		Reject

Defect	Insp	ect Item			Ins	spectio	n St	tandards	6	
	•		W			0.03		03 <w<0.0< td=""><td></td><td>V&gt;0.05</td></w<0.0<>		V>0.05
		<ul><li>* Glass Scratch</li><li>* Polarizer Scratch</li></ul>	L	 L<5			L<3		Any	
Minor	Linear Defect	* Fiber and Linear	ACC. NO.	1			1 1		Reject	
		material	Note	L is th	e ler	ngth and V	V is th	ne width of	the de	fect
		* Foreign material	Φ	Ф <u>&lt;</u> (		0.1<⊕ <u>&lt;</u>	0.15	0.15<⊕ <u>&lt;</u> 0	.2	<b>⊕&gt;0.2</b>
	Black Spot and			3EA 100m	۸/ nm <sup>2</sup>	2		1		0
Minor	Polarizer Pricked	and glass * Polarizer hole or protuberance by external force	Note					r of the de fects > 10n		
		* Unobvious	Φ		⊕ <u>&lt;</u> (	0.3	0.3	<Φ <u>&lt;</u> 0.5	0.	<b>5&lt;</b> Φ
	White Spot	transparant foreign material between	AUU.	3EA	A / 10	00mm <sup>2</sup>		1		0
Minor	and Bubble in polarizer	glass and glass or glass and polarizer * Air protuberance between polarizer and glass	Note			•		er of the de fects > 10n		
			Φ	Φ <u>&lt;</u> 0.	.10	0.10<⊕ <u>.</u>	<u>&lt;</u> 0.20	0.20<⊕ <u>&lt;</u>	<u>&lt;</u> 0.25	Φ>0.
			ACC. NO.	3EA 100m	ι/ Im <sup>2</sup>	2		1		0
Minor	Segment Defect			W is more than 1/2 s				segment width		Reje
	Delete		Note	Φ= − Distan	~		vo de	fect is 10m	m	
			Φ	Ф <u>&lt;</u> 0.	.10	<b>0.10</b> <Φ	<u>&lt;</u> 0.20	<b>0.20&lt;</b> ⊕∢	<u>&lt;</u> 0.25	Φ <b>&gt;0</b> .
	Protuberant	W K K K K K K K K K K K K K K K K K K K	W	Glu	е	W <u>&lt;</u> 1/2 W <u>&lt;</u> 0		W <u>&lt;</u> 1/2 W <u>&lt;</u> 0		Igno
Minor	Segment	$\Phi = (L + W) / 2$	ACC. NO.	3EA 100m	n / Im²	2		1		0
			1. Seg	-						
			B-			0.4mm A<1/2B		B <u>&lt;</u> 1.0mm -A<0.2		.0mm
Minor	Assembly Mis-alignment		Juc			ceptable		ceptable		eptable
			2. Dot	Matrix						
			Defo	rmatior	ז>2°					Reje
Minor	Stain on LCD Panel Surface		Accept when stains can be wiped lightly with a soft clo or a similar one. Otherwise, judged according to the above items: "Black spot" and "White Spot"							

**Issued Date:** 2009.08.04 **Doc. No.:** 

# 8. RELIABILITY

NO.	Item	Condition	Criterion
1	High Temperature Operating	70℃, 96Hrs	
2	Low Temperature Operating	-20℃, 96Hrs	
3	High Humidity	60℃, 90%RH, 96Hrs	
4	High Temperature Storage	80°C, 96Hrs	
5	Low Temperature Storage	-30℃, 96Hrs	No defect in cosmetic and
		Random wave	operational function allowable.
0	Vibration	10 ~ 100Hz	Total current Consumption should
6		Acceleration: 2g	be below double of initial value
		2 Hrs per direction(X,Y,Z)	
		-20℃ to 25℃ to 70℃	
7	Thermal Shock	(60Min) (5Min) (60Min)	
		16Cycles	
0		Contract Discharge Voltage: +1 ~ 5kV and -1 ~ -5kV	There will be discharged ten times at every discharging
8	ESD Testing	Air Discharge Voltage: +1 ~ 8kV and -1 ~ -8kV	voltage cycle. The voltage gap is 1kV.

Note: 1) Above conditions are suitable for standard products.

2) For restrict products, the test conditions listed as above must be revised.

#### Issued Date: 2009.08.04 Doc. No.:

# 9. HANDLING PRECAUTION

(1) Mounting Method

The panel of the LCD Module consists of two thin glass plates with polarizers which easily get damaged since the Module is fixed by utilizing fitting holes in the printed circuit board. Extreme care should be taken when handling the LCD Modules.

(2) Caution of LCD handling & cleaning

When cleaning the display surface, use soft cloth with solvent (recommended below) and wipe lightly.

- Isopropyl alcohol
- Ethyl alcohol
- Trichloro trifloro thane

Do not wipe the display surface with dry or hard materials that will damage the polarizer surface. Do not use the following solvent:

- Water
- Ketone
- Aromatics
- (3) Caution against static charge

The LCD Module use C-MOS LSI drivers, so we recommend that you connect any unused input terminal to VDD or VSS, do not input any signals before power is turned on. And ground your body, Work/assembly table. And assembly equipment to protect against static electricity.

#### (4) Packaging

- Modules use LCD elements, and must be treated as such. Avoid intense shock and falls from a height.
- To prevent modules from degradation. Do not operate or store them exposed directly to sunshine or high temperature/humidity.
- (5) Caution for operation
  - It is indispensable to drive LCD's within the specified voltage limit since the higher voltage than the limit shorten LCD life. An electrochemical reaction due to direct current causes LCD deterioration, Avoid the use of direct current drive.
  - Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD's show dark color in them. However those phenomena do not mean malfunction or out of order with LCD's. Which will come back in the specified operating temperature range.
  - If the display area is pushed hard during operation, some font will be abnormally displayed but it resumes normal condition after turning off once.
  - A slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit.
  - Usage under the relative condition of 40°C, 50%RH or less is reequired.

(6) Storage

- In the case of storing for a long period of time (for instance.) For years) for the purpose or replacement use, The following ways are recommended.
  - Storage in a polyethylene bag with sealed so as not to enter fresh air outside in it, And with no desiccant.
- Placing in a dark place where neither exposure to direct sunlight nor light is. Keeping temperature in the specified storage temperature range.
- Storing with no touch on polarizer surface by the anything else. (It is recommended to store them as they have been contained in the inner container at the time of delivery)
- (7) Safety
  - It is recommendable to crash damaged or unnecessary LCD into pieces and wash off liquid crystal by using solvents such as acetone and ethanol.

Which should be burned up later.

When any liquid crystal leaked out of a damaged glass cell comes in contact with your hands, please wash it off well with soap and water.

